

MODE
ACOUSTIC



Drop Felt Baffle



**national
solutions**

Drop Felt Vertical Baffle



Details

Product Name	Mode Acoustic Drop Felt Vertical Baffle
Content	100% Polyester (PET) with a minimum of 60% recycled content
Thickness	12mm
Width	6.25"
Length	6.25"
Height	24", 36", 48", 72"
Tolerance	1/16"
Weight	1lb per linear foot
Edges	Exposed felt
Unit of Sale	Per unit

Variations

Mode Felt uses an industry standard felting process. Slight and consistent variations in color and "heathering" should be expected when using this sustainable material. Slight imperfections are within normal manufacturing tolerance and not visible in standard installations.

Acoustic Ratings

NRC	1.0*
-----	------

*Depending on baffle heights and distance from the floor.

Fire Performance

ASTM-84	Product made from Class A PET felt material
---------	---

Installation

Methods	Lay-in
---------	--------


Maintenance & Warranty

Vacuum to remove any loose dirt or dust. You may use a soft or plastic bristle brush to loosen it. Avoid excess pressure. Compressed air can also be used to dust the material in difficult or large installations. If stains are present, you may saturate a lint-free cloth with a mild detergent or soap and water solution.


10 year warranty.

Drop Felt Vertical Baffle


Dimensions & Installation

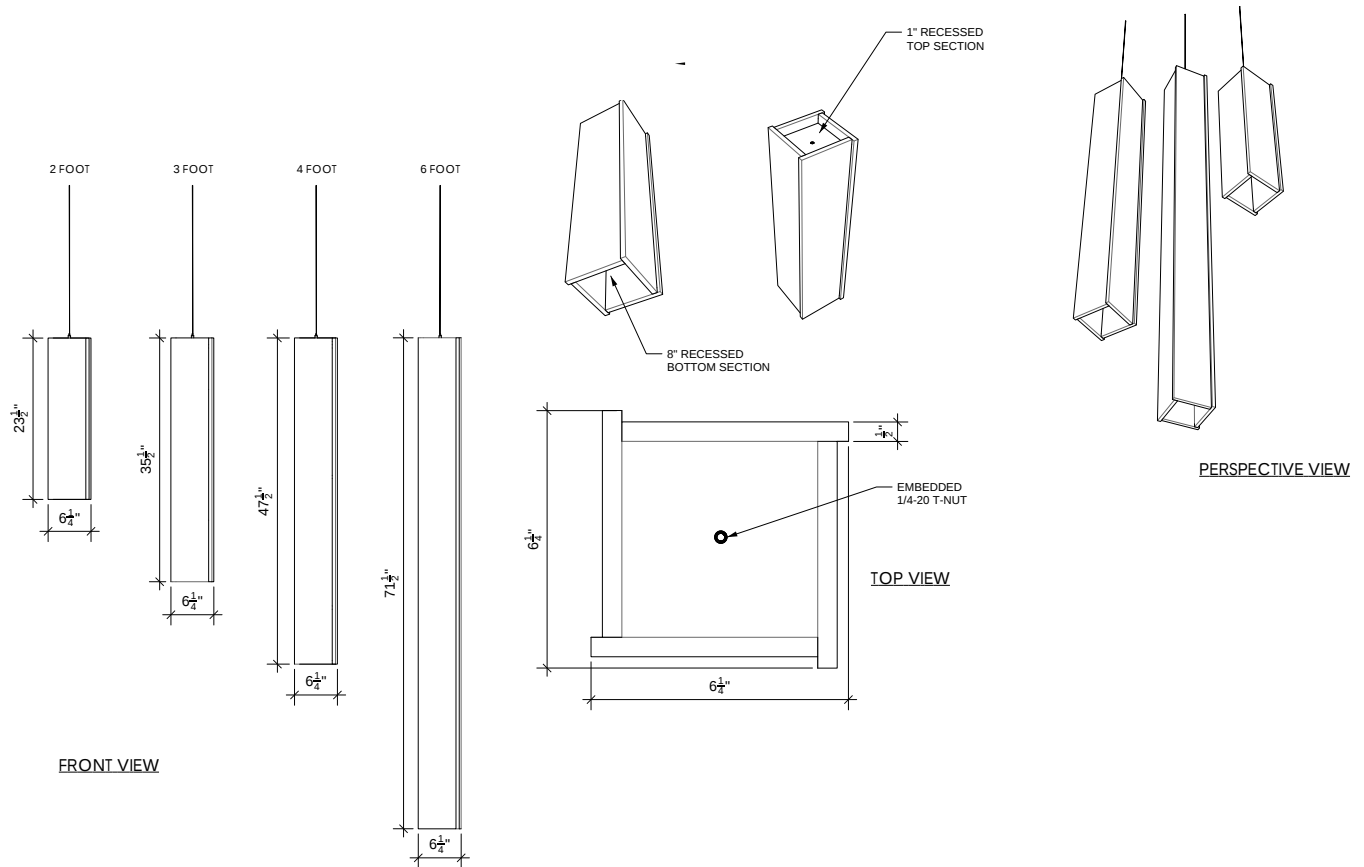

STEP ONE
PRE-INSTALL 1/16" AIRCRAFT CABLE
ONTO CEILING IN DESIRED
LOCATION AND PATTERN

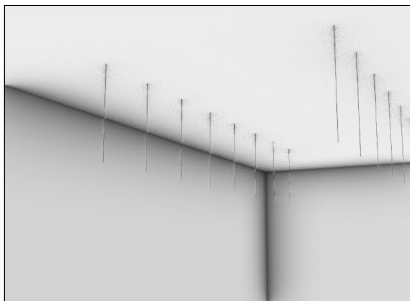

STEP TWO
WITH CABLE GRIPPER PRE-INSTALLED
LIFT BAFFLES INTO POSITION
AND ATTACH CABLES

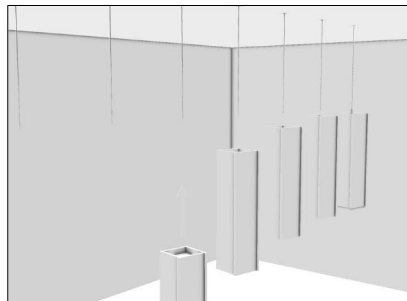

Drop Felt Vertical Baffle



Environmental

- Minimum 60% post-consumer recycled PET (third-party certified)
- 100% recyclable material composition
- Formaldehyde: Not detected
- Ultra-low VOC emissions (near-zero TVOC)
- Free of:
 - SVHCs (>0.1%)
 - Heavy metals & restricted substances (RoHS)
- Select products utilize mechanical joinery construction, eliminating the need for adhesives and enabling monomaterial recyclability
- Reduced reliance on chemical adhesives supports improved indoor air quality
- EPD-backed lifecycle transparency (ISO 14025 / ISO 21930)
- Designed for long service life (~30 years)

Certifications

- **GREENGUARD Gold Certified® (UL 2818)**
Certified for low chemical emissions supporting indoor air quality
- **OEKO-TEX® STANDARD 100 – Product Class I**
Tested for harmful substances and safe for direct human contact
- **Environmental Product Declaration (EPD) – UL Verified**
Lifecycle assessment providing environmental impact transparency
- **SCS Recycled Content Certified (≥60% post-consumer PET)**
Third-party verified recycled material content
- **Red List Compliant (LBC Framework)**
Free of chemicals of concern per Living Building Challenge criteria
- **REACH SVHC Compliant**
No Substances of Very High Concern above regulatory thresholds
- **RoHS Compliant**
Free of restricted heavy metals and hazardous substances
- **ASTM E84 – Class A Fire Rating**
Meets stringent fire performance requirements for interior materials